



# The Pop Down<sup>®</sup> Sink Drain

WWW.BOUNTYBRASSWARE.US

## BBUX: Standard Installation

## 71310-##

**Note: This waste fits sinks WITH or WITHOUT over-flow. This drain fits BOTH types of sinks.**

- 1 Bounty Brassware Americas recommends installation by a Licensed Plumber
- 2 Check that sink drain opening is 1-5/8" minimum diameter and that the flange sits neatly in sink drain recess
- 3 Apply non-staining sealant to underside of **FLANGE (B)** sufficient to contact and seal well  
Neutral cure silicone sealant is also okay. **WARNING: Oil-based Plumbers Putty may react with some finishes**
- 4 Place **FLANGE (B)** with sealant into sink opening and check that flange/sink seal is good

- 5 **THICK SINKS:** Use only one **RUBBER WASHER (C)**

**THIN SINKS:** Use 2 **RUBBER WASHERS (C)** on either side of **SPACER (D)**, as shown. Be sure washers are seated correctly


- 6 Carefully screw **BODY (E)** on to **FLANGE (B)** from underside of sink. Make sure **RUBBER WASHER (C)** is correctly seated in the recess on top of lower body. Do not over-tighten. Use rubber-safe lubricant if needed.

**\*\*Installation Trick:** If the bottom of the sink is a very coarse/rough casting, apply a small bead of silicone to the top of the **RUBBER WASHER (C)** to seal sink manufacturer's voids and thus create an effective seal.


- 7 Attach **TAIL PIECE (H)** to **BODY (E)** with **NUT (G)** and **TAIL PIECE WASHER (F)** in order shown

- 8 **TAIL PIECE (H)** may need to be trimmed to suit balance of waste system . P-trap and drain accessories not included

- 9 Install **Cartridge (A)**. Drain is open when flush and closed when down




OPEN



CLOSED



C

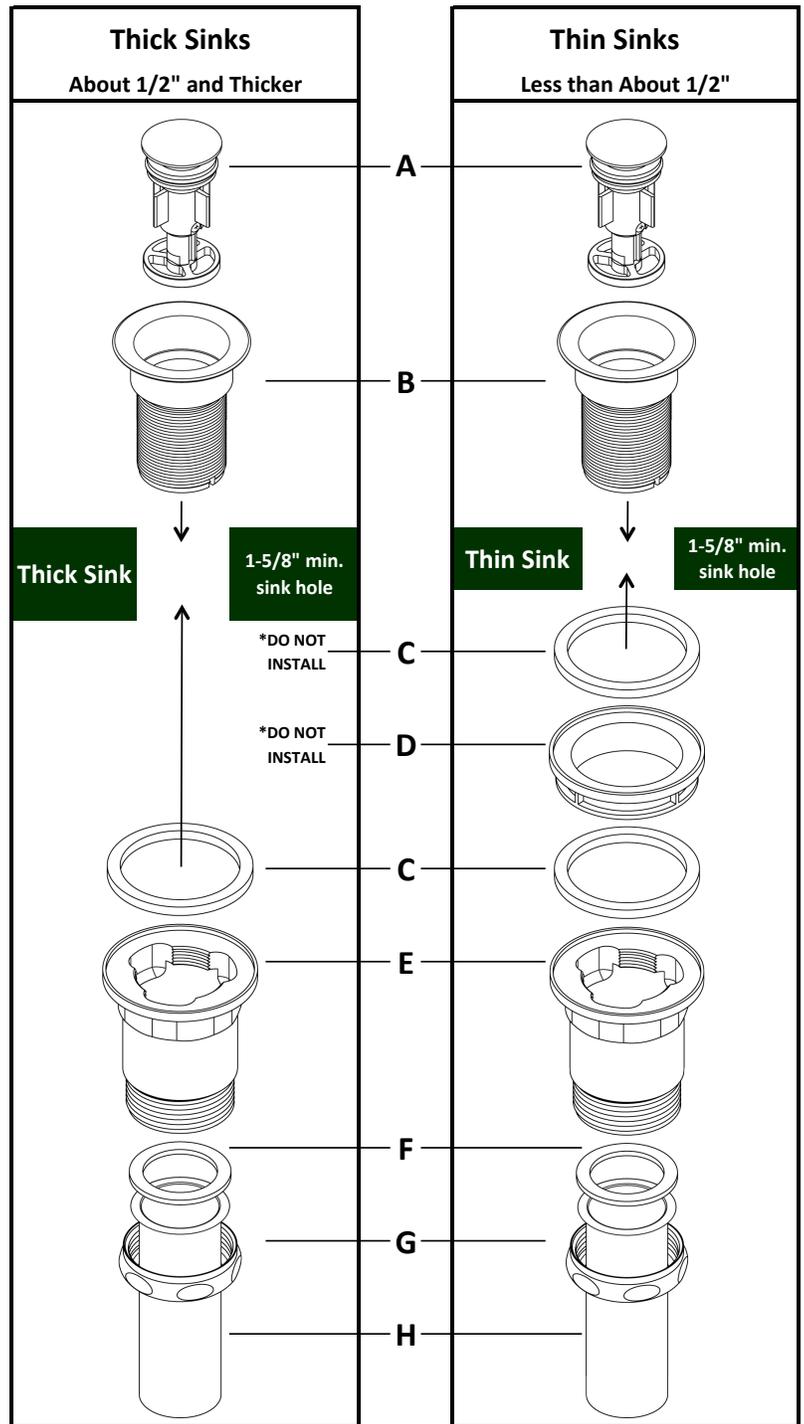

Drawings not to scale

U.S. Patent 9151027

BOUNTY BRASSWARE AMERICAS, LLC, THE AMERICA'S DISTRIBUTOR, IS A SOLE AND SEPARATE ENTITY AND IS NEITHER RELATED TO NOR OWNED BY BOUNTY BRASSWARE OF AUSTRALIA

REVISED: 19-Jun-18

©2016 BOUNTY BRASSWARE AMERICAS, LLC





# The Pop Down® Sink Drain

WWW.BOUNTYBRASSWARE.US

## BBUX: Installation with accessory Extension 29356 for extra-thick sinks (only)

Stack our Extensions to suit virtually any sink thickness (sold separately)

- 1** Bounty Brassware Americas recommends installation by a Licensed Plumber
- 2** Check that sink drain opening is 1-5/8" minimum diameter and that the flange sits neatly in sink drain recess
- 3** Apply non-staining sealant to underside of **FLANGE (B)** sufficient to contact and seal well  
Neutral cure silicone sealant is also okay. **WARNING:** Oil-based Plumbers Putty may react with some finishes
- 4** Place **FLANGE (B)** with sealant into sink opening and check that flange/sink seal is good
- 5** Use **EXTENSION(s) 29356** to achieve virtually any sink depth. Apply Teflon thread tape to bottom of **FLANGE (B)** and screw in to top of **EXTENSION**. Your custom installation may require the use of **RUBBER WASHER (C)** and **SPACER (D)**  
See \*ALTERNATE exploded view; far right column
- 6** Carefully screw **BODY (E)** on to **FLANGE (B)** from underside of sink. Make sure **RUBBER WASHER (C)** is correctly seated in the recess on top of lower body. Do not over-tighten  
**\*\*Installation Trick:** If the bottom of the sink is uneven or is a very coarse/rough casting, apply a small bead of silicone to the top of the **RUBBER WASHER (C)** to seal sink manufacturer's voids and thus create an effective seal
- 7** Attach **TAIL PIECE (H)** to **BODY (E)** with **NUT (G)** and **TAIL PIECE WASHER (F)** in order shown
- 8** **TAIL PIECE (H)** may need to be trimmed to suit balance of waste system . P-trap and drain accessories not included
- 9** Install **Cartridge (A)**. Drain is open when flush and closed when down

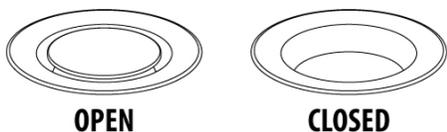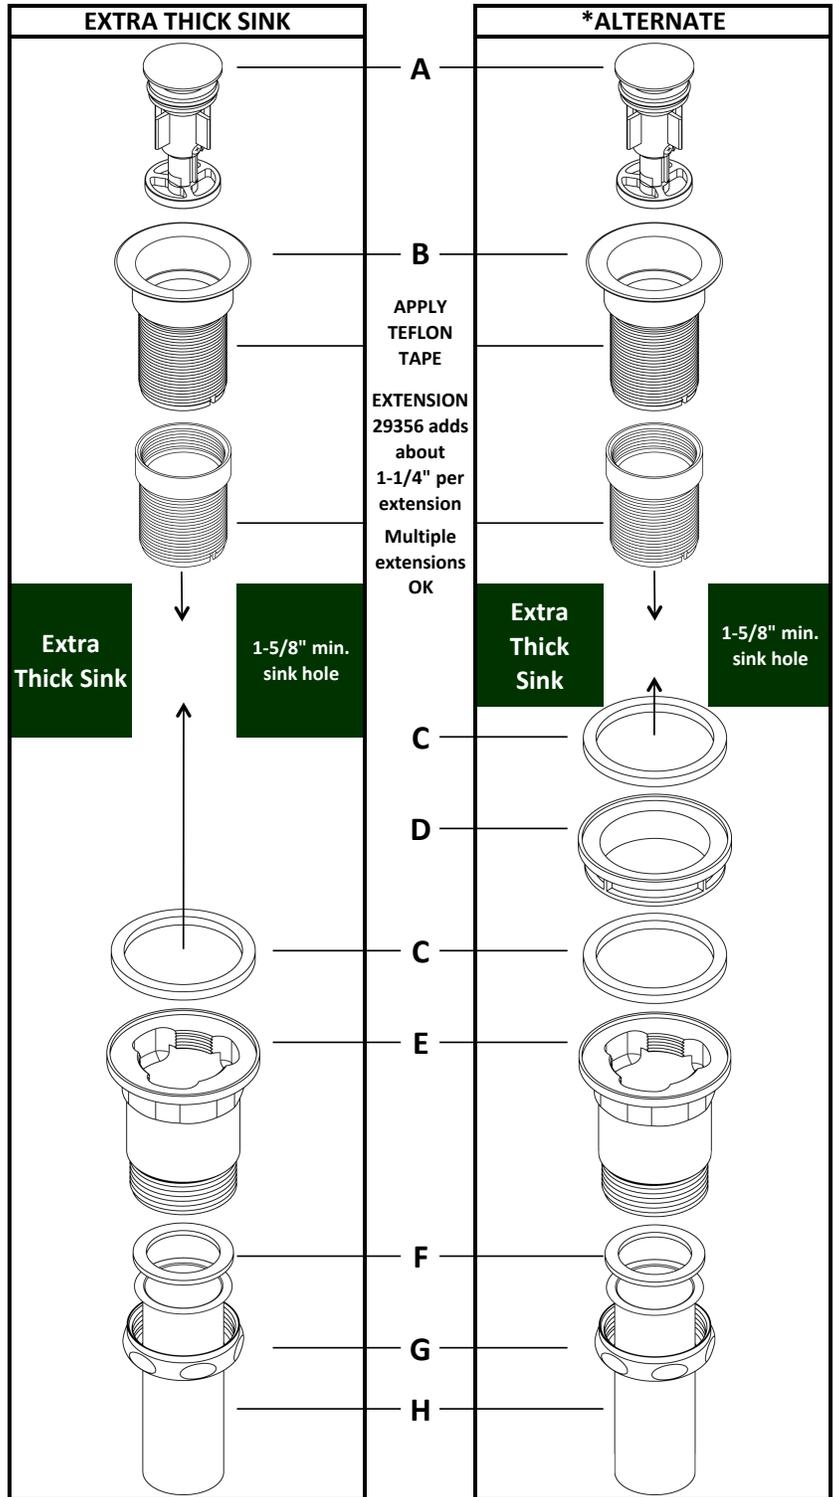

Drawings not to scale

U.S. Patent 9151027

BOUNTY BRASSWARE AMERICAS, LLC, THE AMERICA'S DISTRIBUTOR, IS A SOLE AND SEPARATE ENTITY AND IS NEITHER RELATED TO NOR OWNED BY BOUNTY BRASSWARE OF AUSTRALIA

REVISED: 19-Jun-18

©2016

BOUNTY BRASSWARE AMERICAS, LLC